

G1 GSM Remote Control Switch

The G1 is a simple phone activated switch for the use of remotely controlling virtually anything from an authorised phone without call costs. The Users are programmed into the device by SMS. The device recognises incoming Caller ID's & hangs up before switching. The G1 has built in features to avoid being cut off the network. G1 is a simple, low cost & ultra reliable GSM device that eliminates ongoing costs!



APPLICATIONS

- Electric Gates & Barriers
- Intercom & Door Entry
- Temp. Visitor Access
- Security & Flood Lights
- Alarm Monitoring & Control
- Garage Doors & Shutters
- 24hr Car Park Access
- Self Storage Access
- Hire & Facility Management
- Fire & Fault Alarm SMS
- Car heating systems (ie: Webasto)
- Heating & Air-Conditioning
- Remote Server Reset
- Rental Property Access
- O/S Property Monitoring
- Start Pumps & Generator

[the list goes on...](#)


WHY CHOOSE G1?

- Easy fit!** Simple stick on mounts & small design
- Global Remote Control!** Control by mobile from anywhere
- Improve Security!** Don't give out pin codes or keyfobs
- Great Value!** No ongoing costs for replacement parts
- Easy to Maintain!** Add or delete Users instantly by SMS
- Convenient!** Your mobile becomes your remote control
- Simple connections!** No complicated wiring

- Multi Voltage!** Works on 12 - 24V AC or DC
- Informative!** GSM signal strength LED indicator & by SMS
- Free SIM Card Included!** Choose your preferred network
- Reliable!** 100% guaranteed to work on all UK networks (except 3)
- EU Made Quality!** Reliable electronics with full local support
- Weatherproof!** With optional IP56 enclosure
- 24 Month Warranty!** Fully supported replacement warranty
- Helpful UK based support!** We help you get it done!

TECHNICAL SPECIFICATION

Power Supply.....	9 - 30V DC
Current consumption - peak.....	1A
Current consumption - transmitting mode.....	320mA
Current consumption - idle mode.....	40mA
Tri band GSM module (QUAD optional).....	900/1800/1900 MHz
PCB dimensions.....	44 x 82mm
Unit dimensions (in IP56 enclosure).....	128 x 89 x 56mm
Antenna (SMA male).....	1
Weight (w/o enclosure).....	60g (PCB) 180g (IP56)

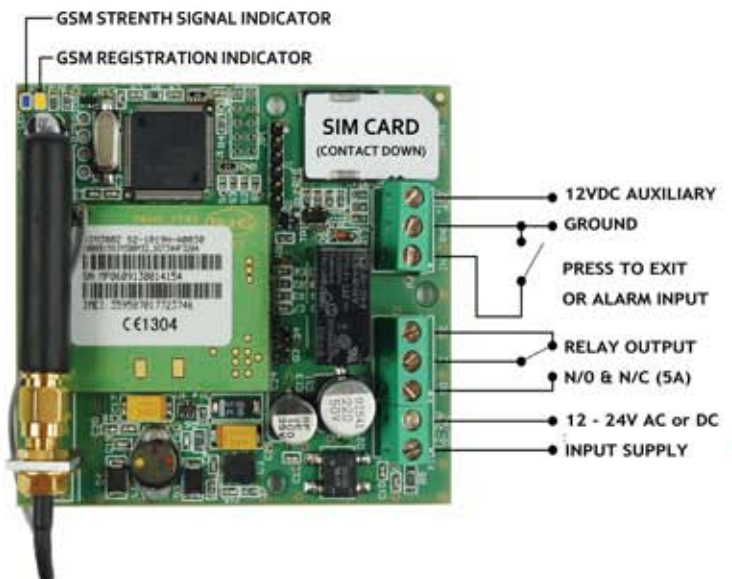

G1 - SMS ALARM DIALER

The G1 can also be used as a simple SMS alarm dialer to send SMS alerts to up to 5 different mobile numbers when an alarm panel or alarm sensor triggers it's input.

- Works with any alarm or stand alone with alarm sensors
- Customise the SMS text received
- Works on any network (except 3)
- Remote control output by calling (free) or sending an SMS

WHERE TO BUY