

'V-LITE' PRO GSM ALARM DIALER

- CONNECT TO ANY ALARM PANEL
- 3 WIRES TO CONNECT
- USE ALARM PANEL POWER SUPPLY
- 10 MINUTE INSTALLATION
- EASY SMS PROGRAMMING



ABOUT

The V-Lite Professional GSM Dialer sends voice & SMS alarms to a list of preset User numbers when it detects an alarm condition. Up to 4 Users can be set and each is allowed to receive the alarm as a call, SMS or both. The V-Lite will inform all or some of the Users for the selected alarm event conditions. Low credit alert & warning of SIM card expiry ensures the SIM card remains active.


FEATURES

- Up to 4 Users can receive alarms by SMS or call
- SIM credit alert (selected networks)
- SIM card expiry warning
- Cancel or divert alarm via DTMF
- Record a voice message per alarm input (2)
- 2 remote control outputs

WHAT'S INCLUDED?

1 x V-Lite in metal enclosure

1 x PAYG SIM Card (any network)

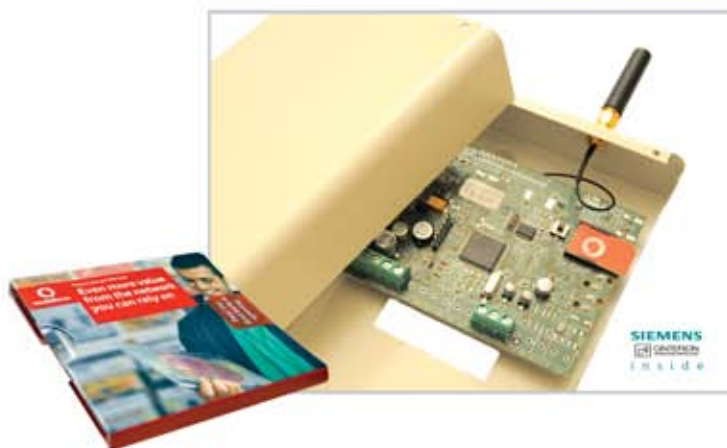

TECHNICAL SPECIFICATIONS

Power Supply.....	12 - 30V AC or DC
Current consumption - peak.....	1A
Current consumption - transmitting mode.....	250mA
Current consumption - idle mode.....	40mA
3 band GSM module (QUAD optl - min. order 100)...	900/1800/1900 MHz
PCB dimensions.....	106 x 89 mm
Unit dimensions (Videx 4K 1, 2 or 4 btn surface)	118 x 170 x 30 mm
Antenna SMA (male).....	1
Weight.....	500g



COME AND VISIT US
ON STAND 4/F6



NEED MORE INFORMATION?

Please call our sales line for any questions. +44(0)203 551 0335